



Click a letter to find what construction will begin in 2010

A Build the new southbound SH 121 to westbound SH 114 frontage road and a portion of the new southbound International Parkway pavement. In late 2010, the existing southbound SH 121 to westbound SH 114 traffic will be shifted onto this construction to build the new southbound SH 121 to westbound SH 114 bridge.

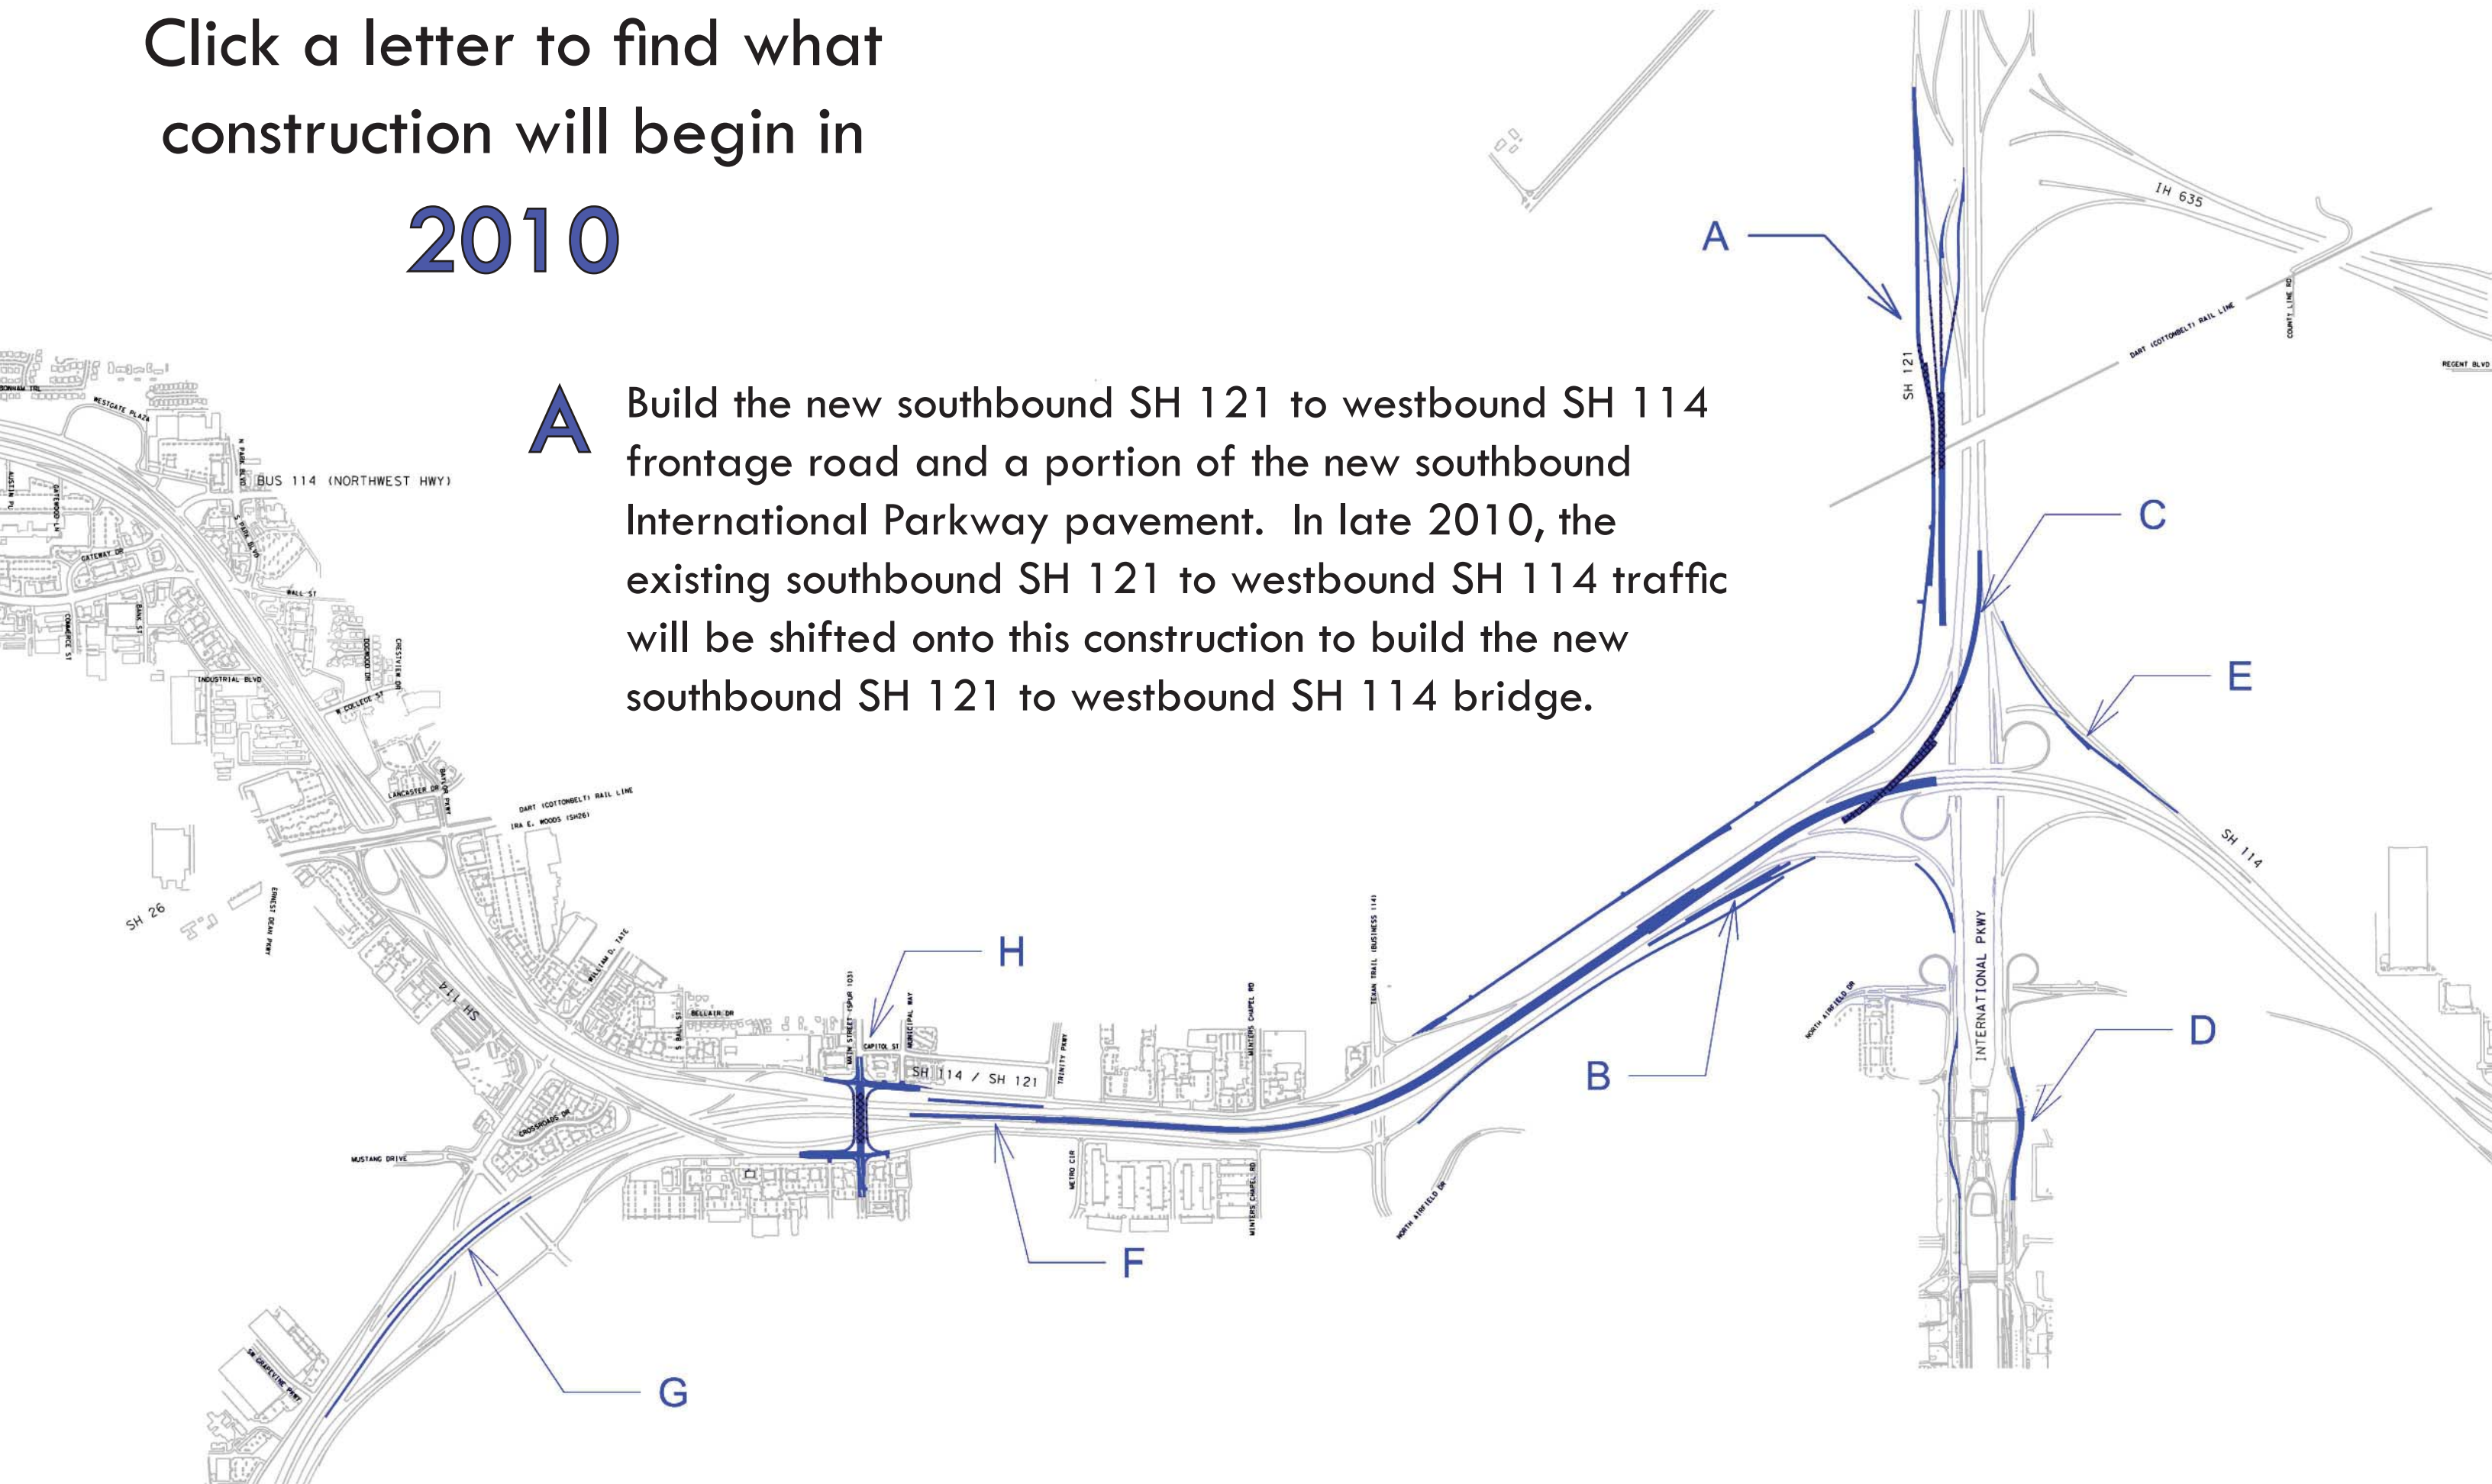


Click a letter to find what construction will begin in 2010

B Build a portion of the new eastbound SH 114 pavement (B) and eastbound SH 114 to northbound SH 121 bridge (C). In late 2010, the existing eastbound SH 114, eastbound SH 114 to northbound SH 121 and eastbound SH 114 into DFW Airport traffic will be shifted to finish building the new eastbound SH 114 to northbound SH 121 bridge.

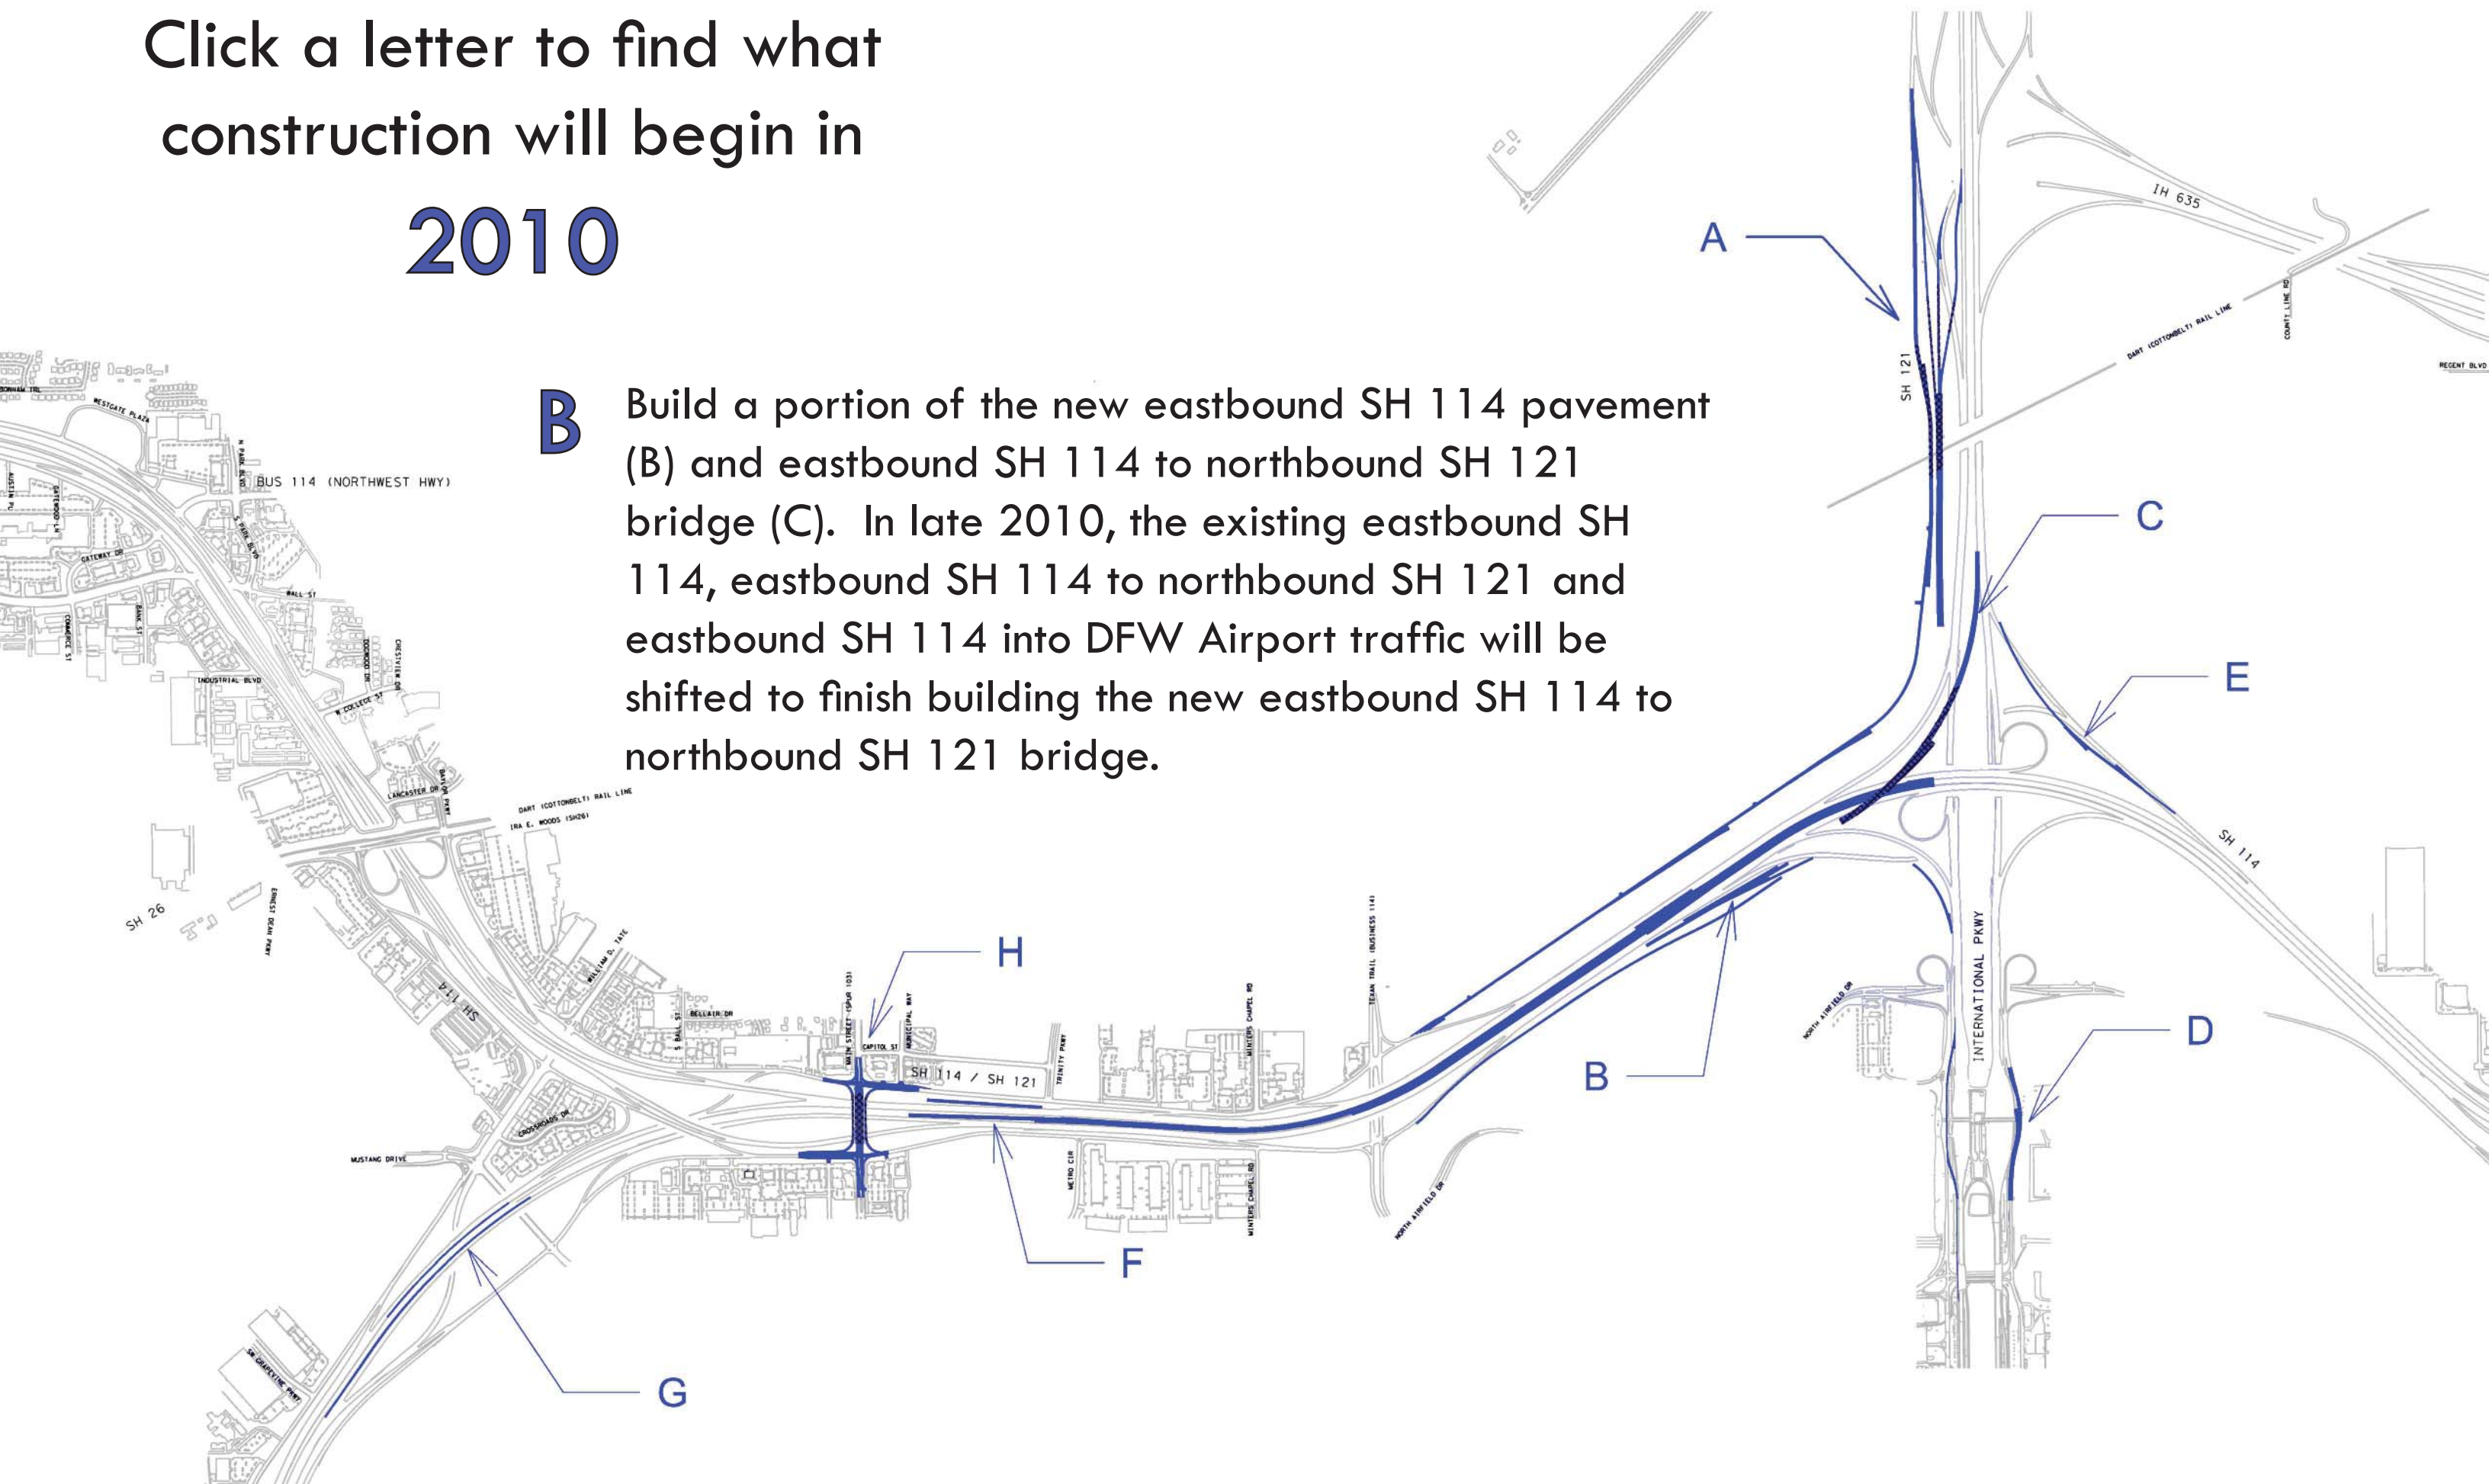


Click a letter to find what construction will begin in 2010

C Build a portion of the new eastbound SH 114 pavement (B) and eastbound SH 114 to northbound SH 121 bridge (C). In late 2010, the existing eastbound SH 114, eastbound SH 114 to northbound SH 121 and eastbound SH 114 into DFW Airport traffic will be shifted to finish building the new eastbound SH 114 to northbound SH 121 bridge.

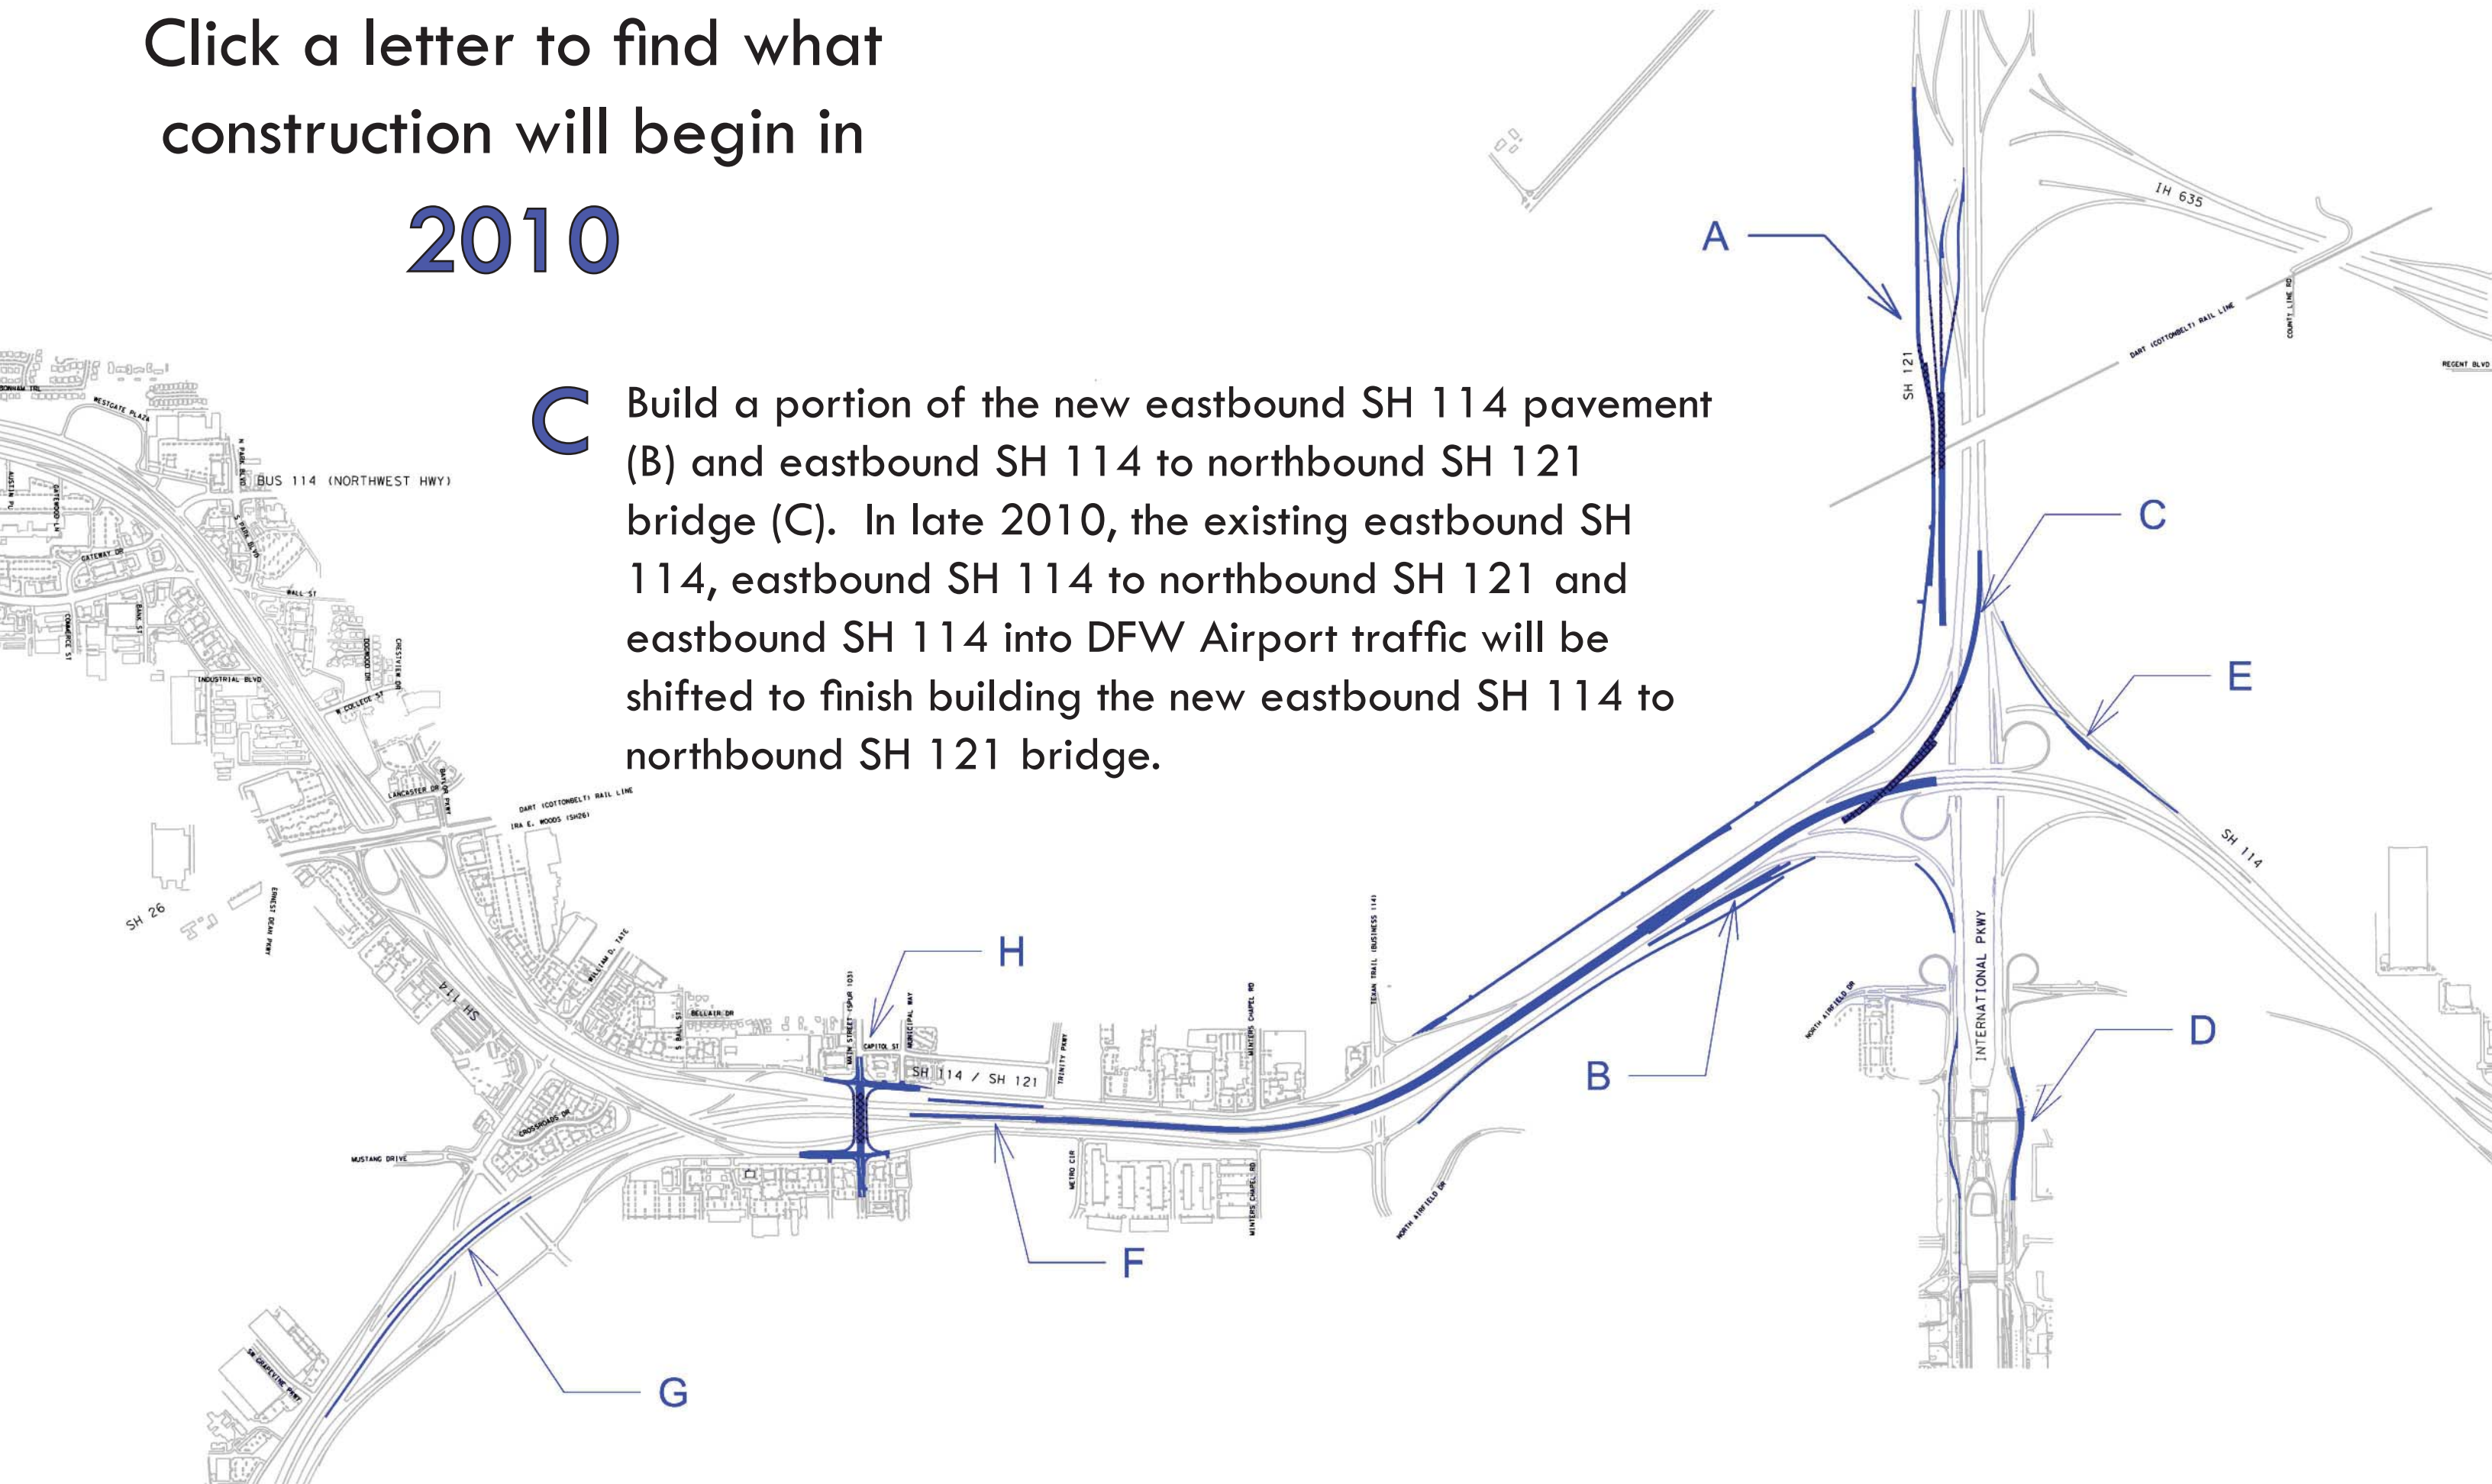


Click a letter to find what construction will begin in 2010

D Build new frontage road ramps in the area of the DFW Airport toll booth. Construction should be complete by late 2010.

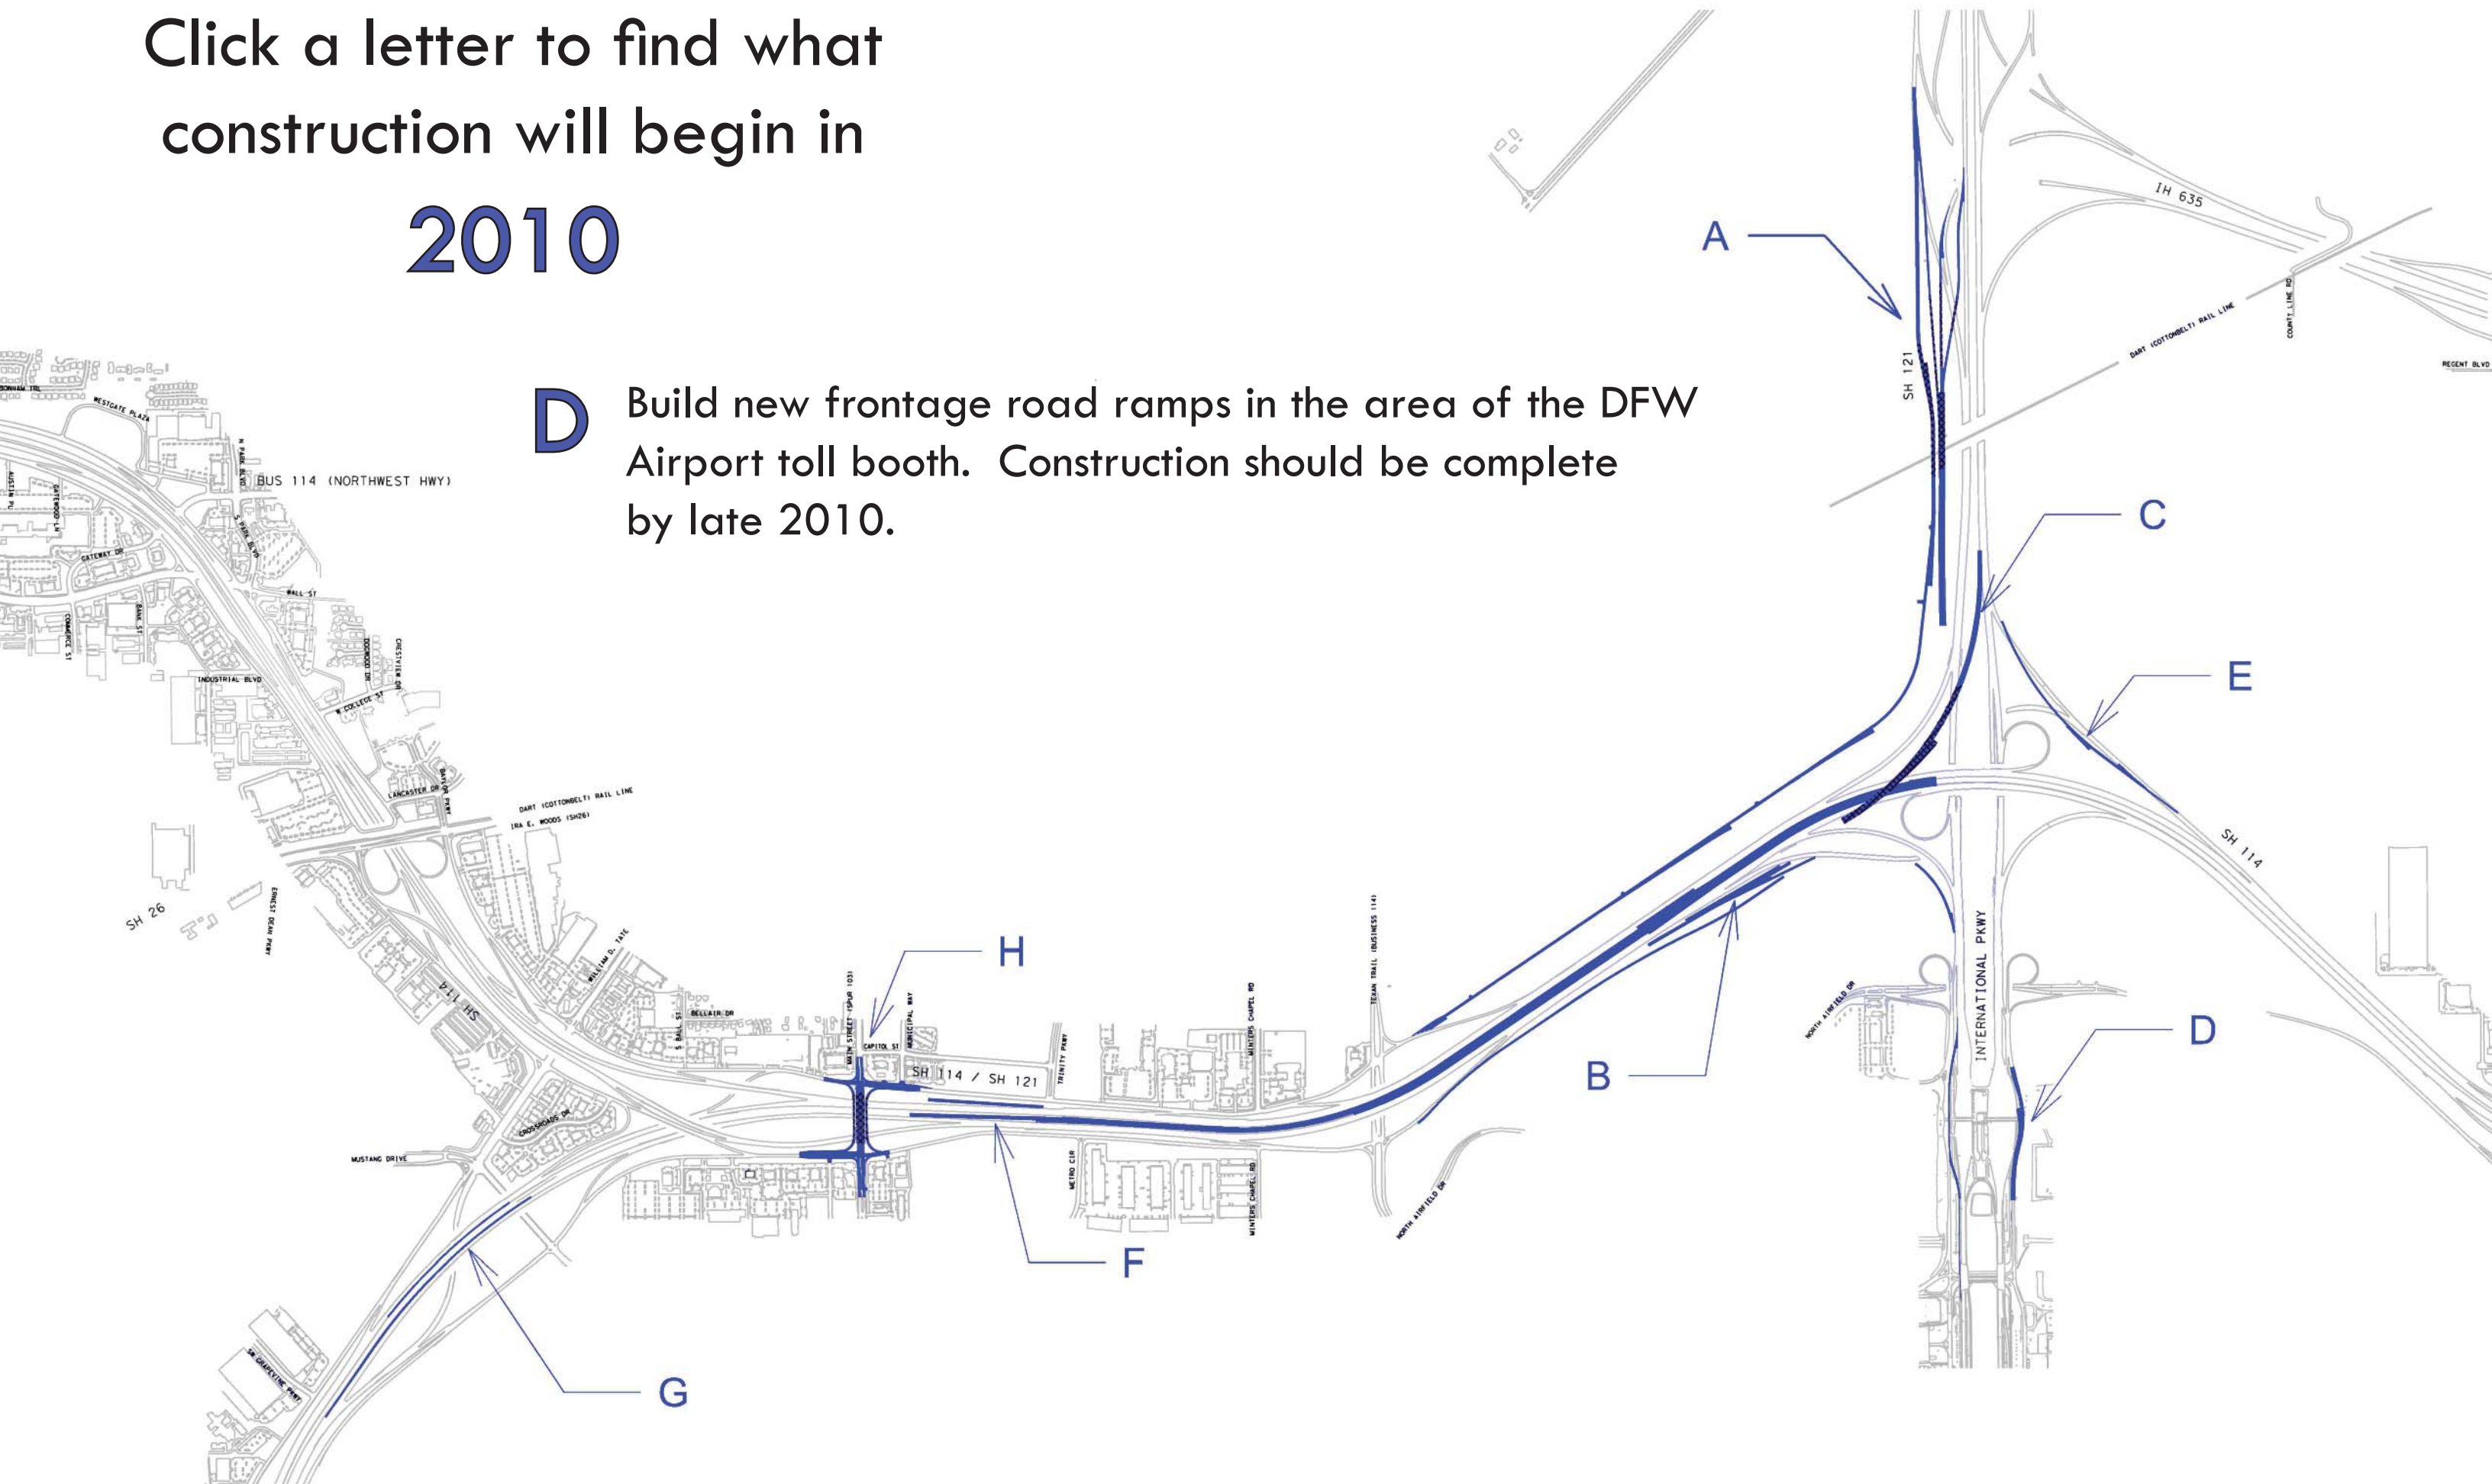


Click a letter to find what construction will begin in 2010

E Build a portion of the new westbound SH 114 to northbound SH 121 pavement. In late 2010, traffic will be shifted onto this construction to build the new westbound SH 114 to DFW Airport bridge.

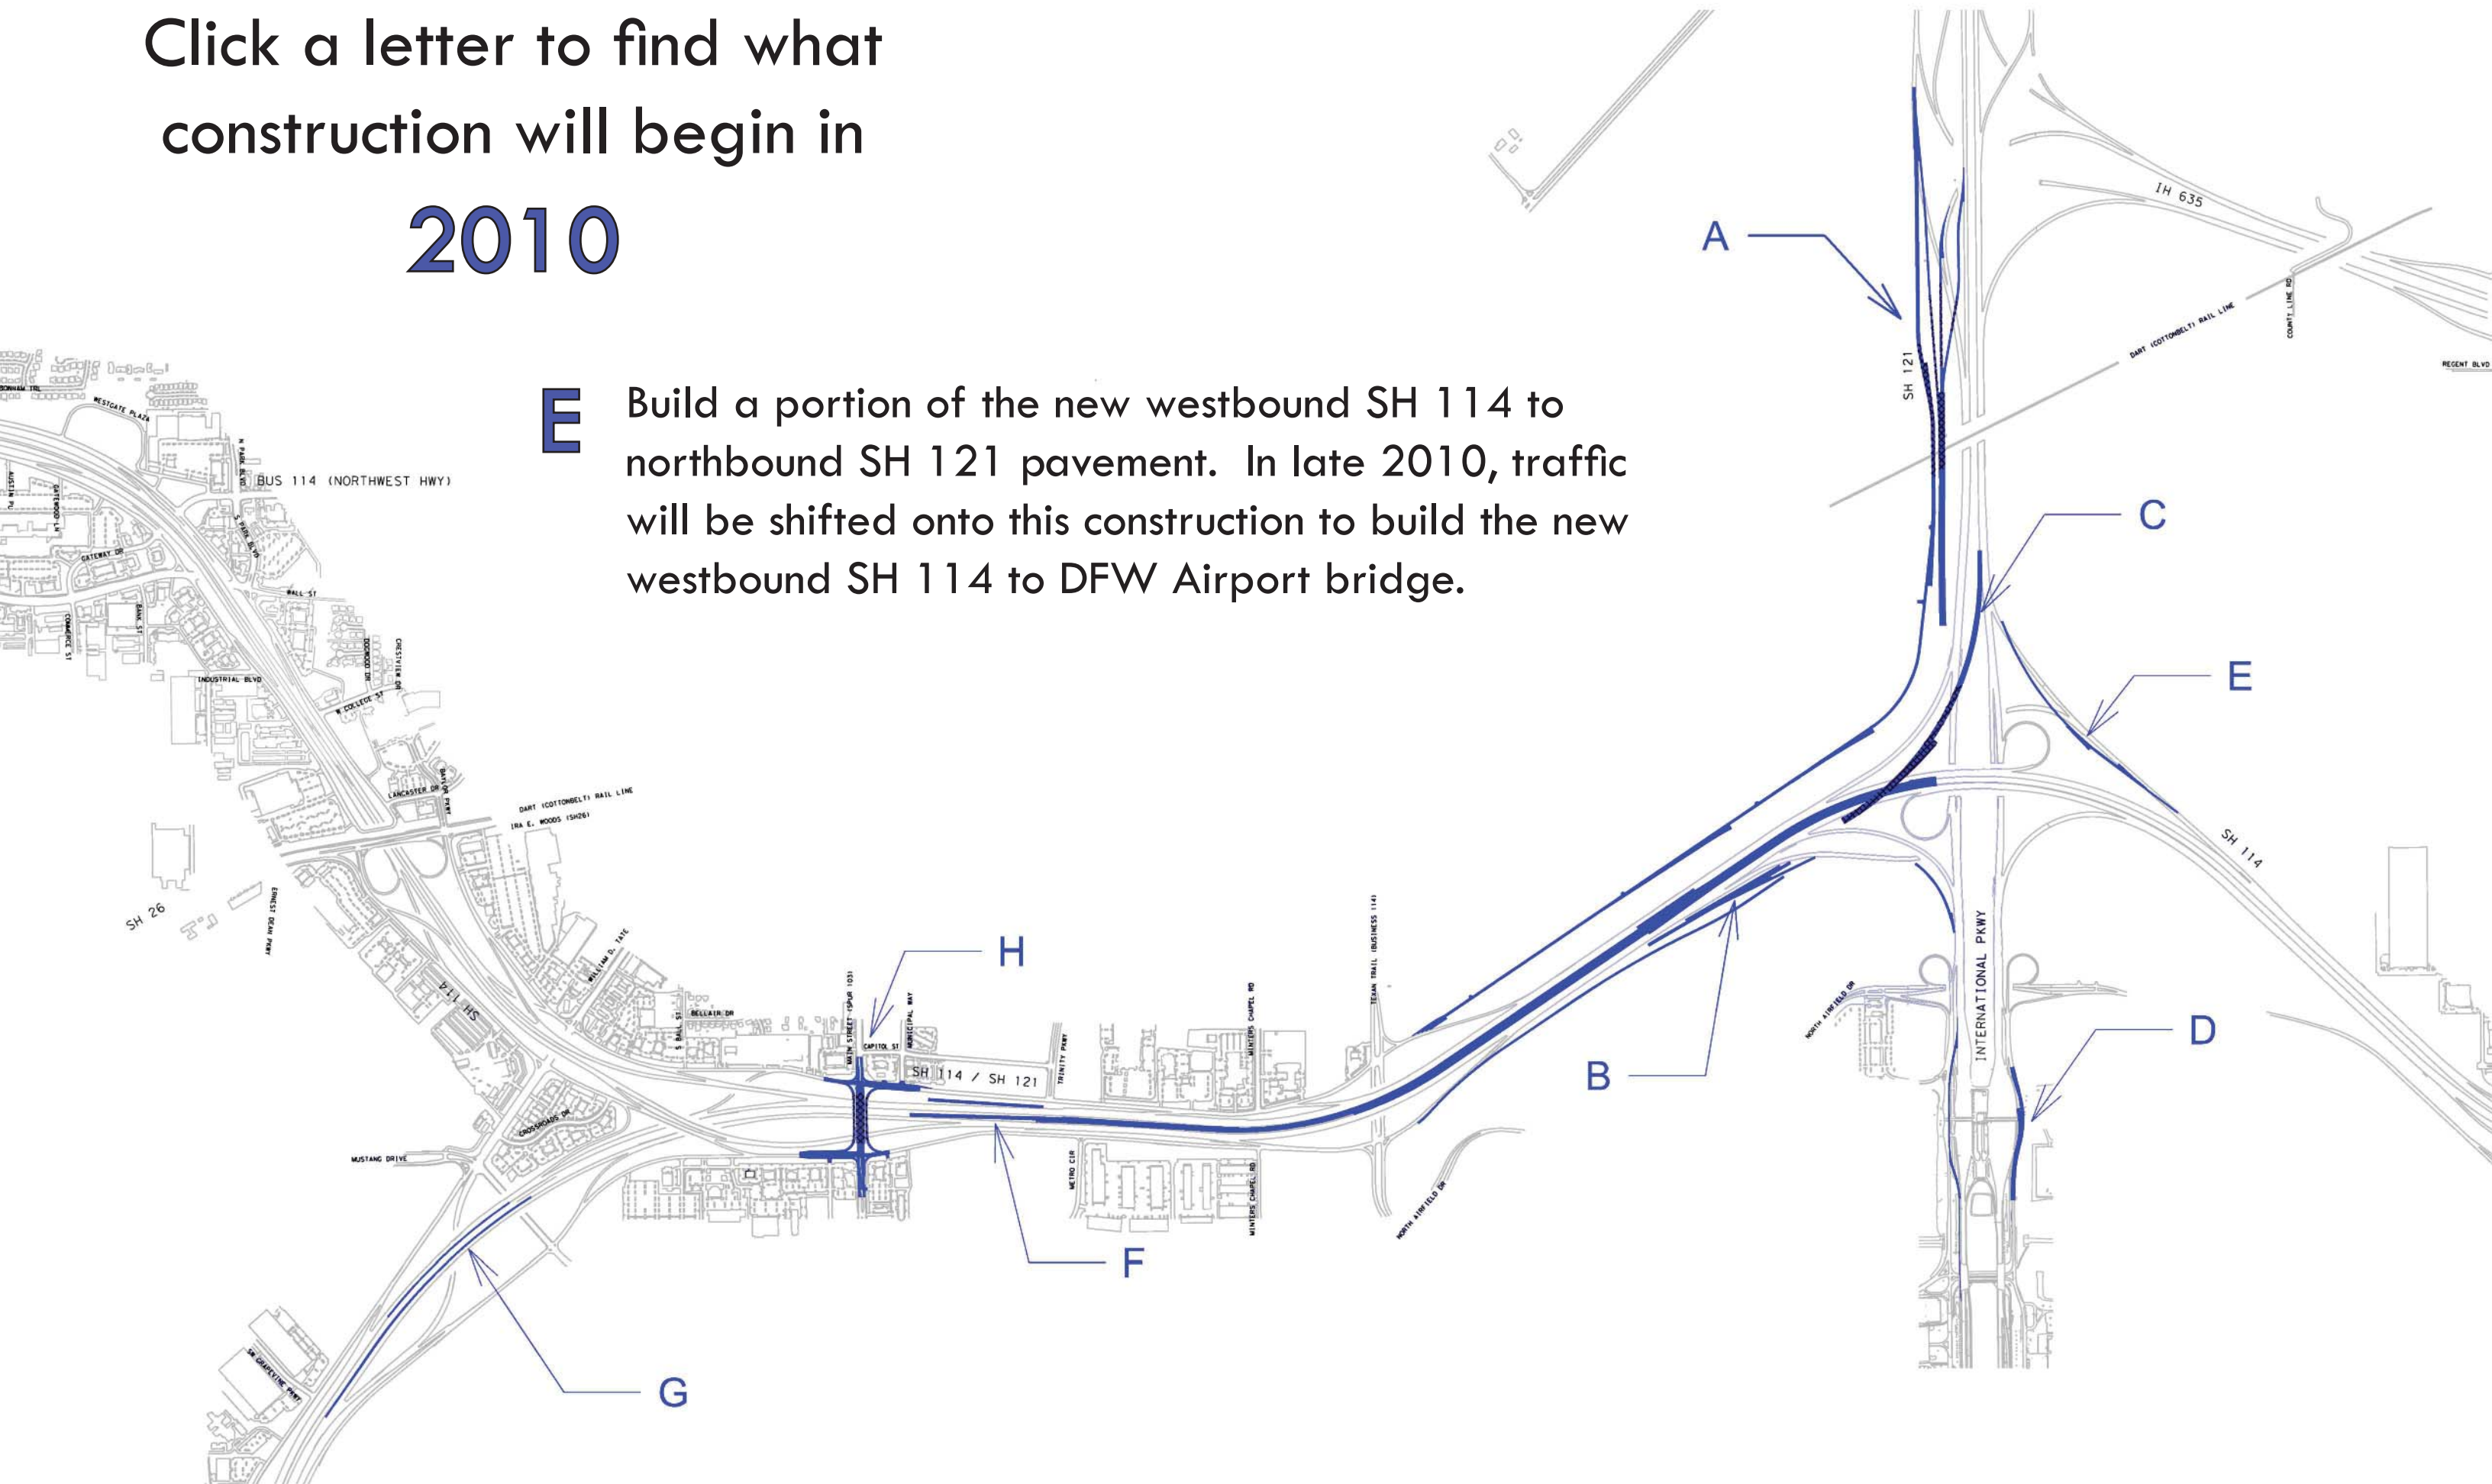


Click a letter to find what construction will begin in 2010

F Build temporary pavement on the outside of the existing eastbound SH 114 and westbound SH 114 lanes. In mid 2010, traffic will be shifted to the outside to build the new SH 114 toll managed lanes in the existing SH 114 median. In late 2010, traffic will be shifted onto this construction to build the new eastbound SH 114 and westbound SH 114 pavement.

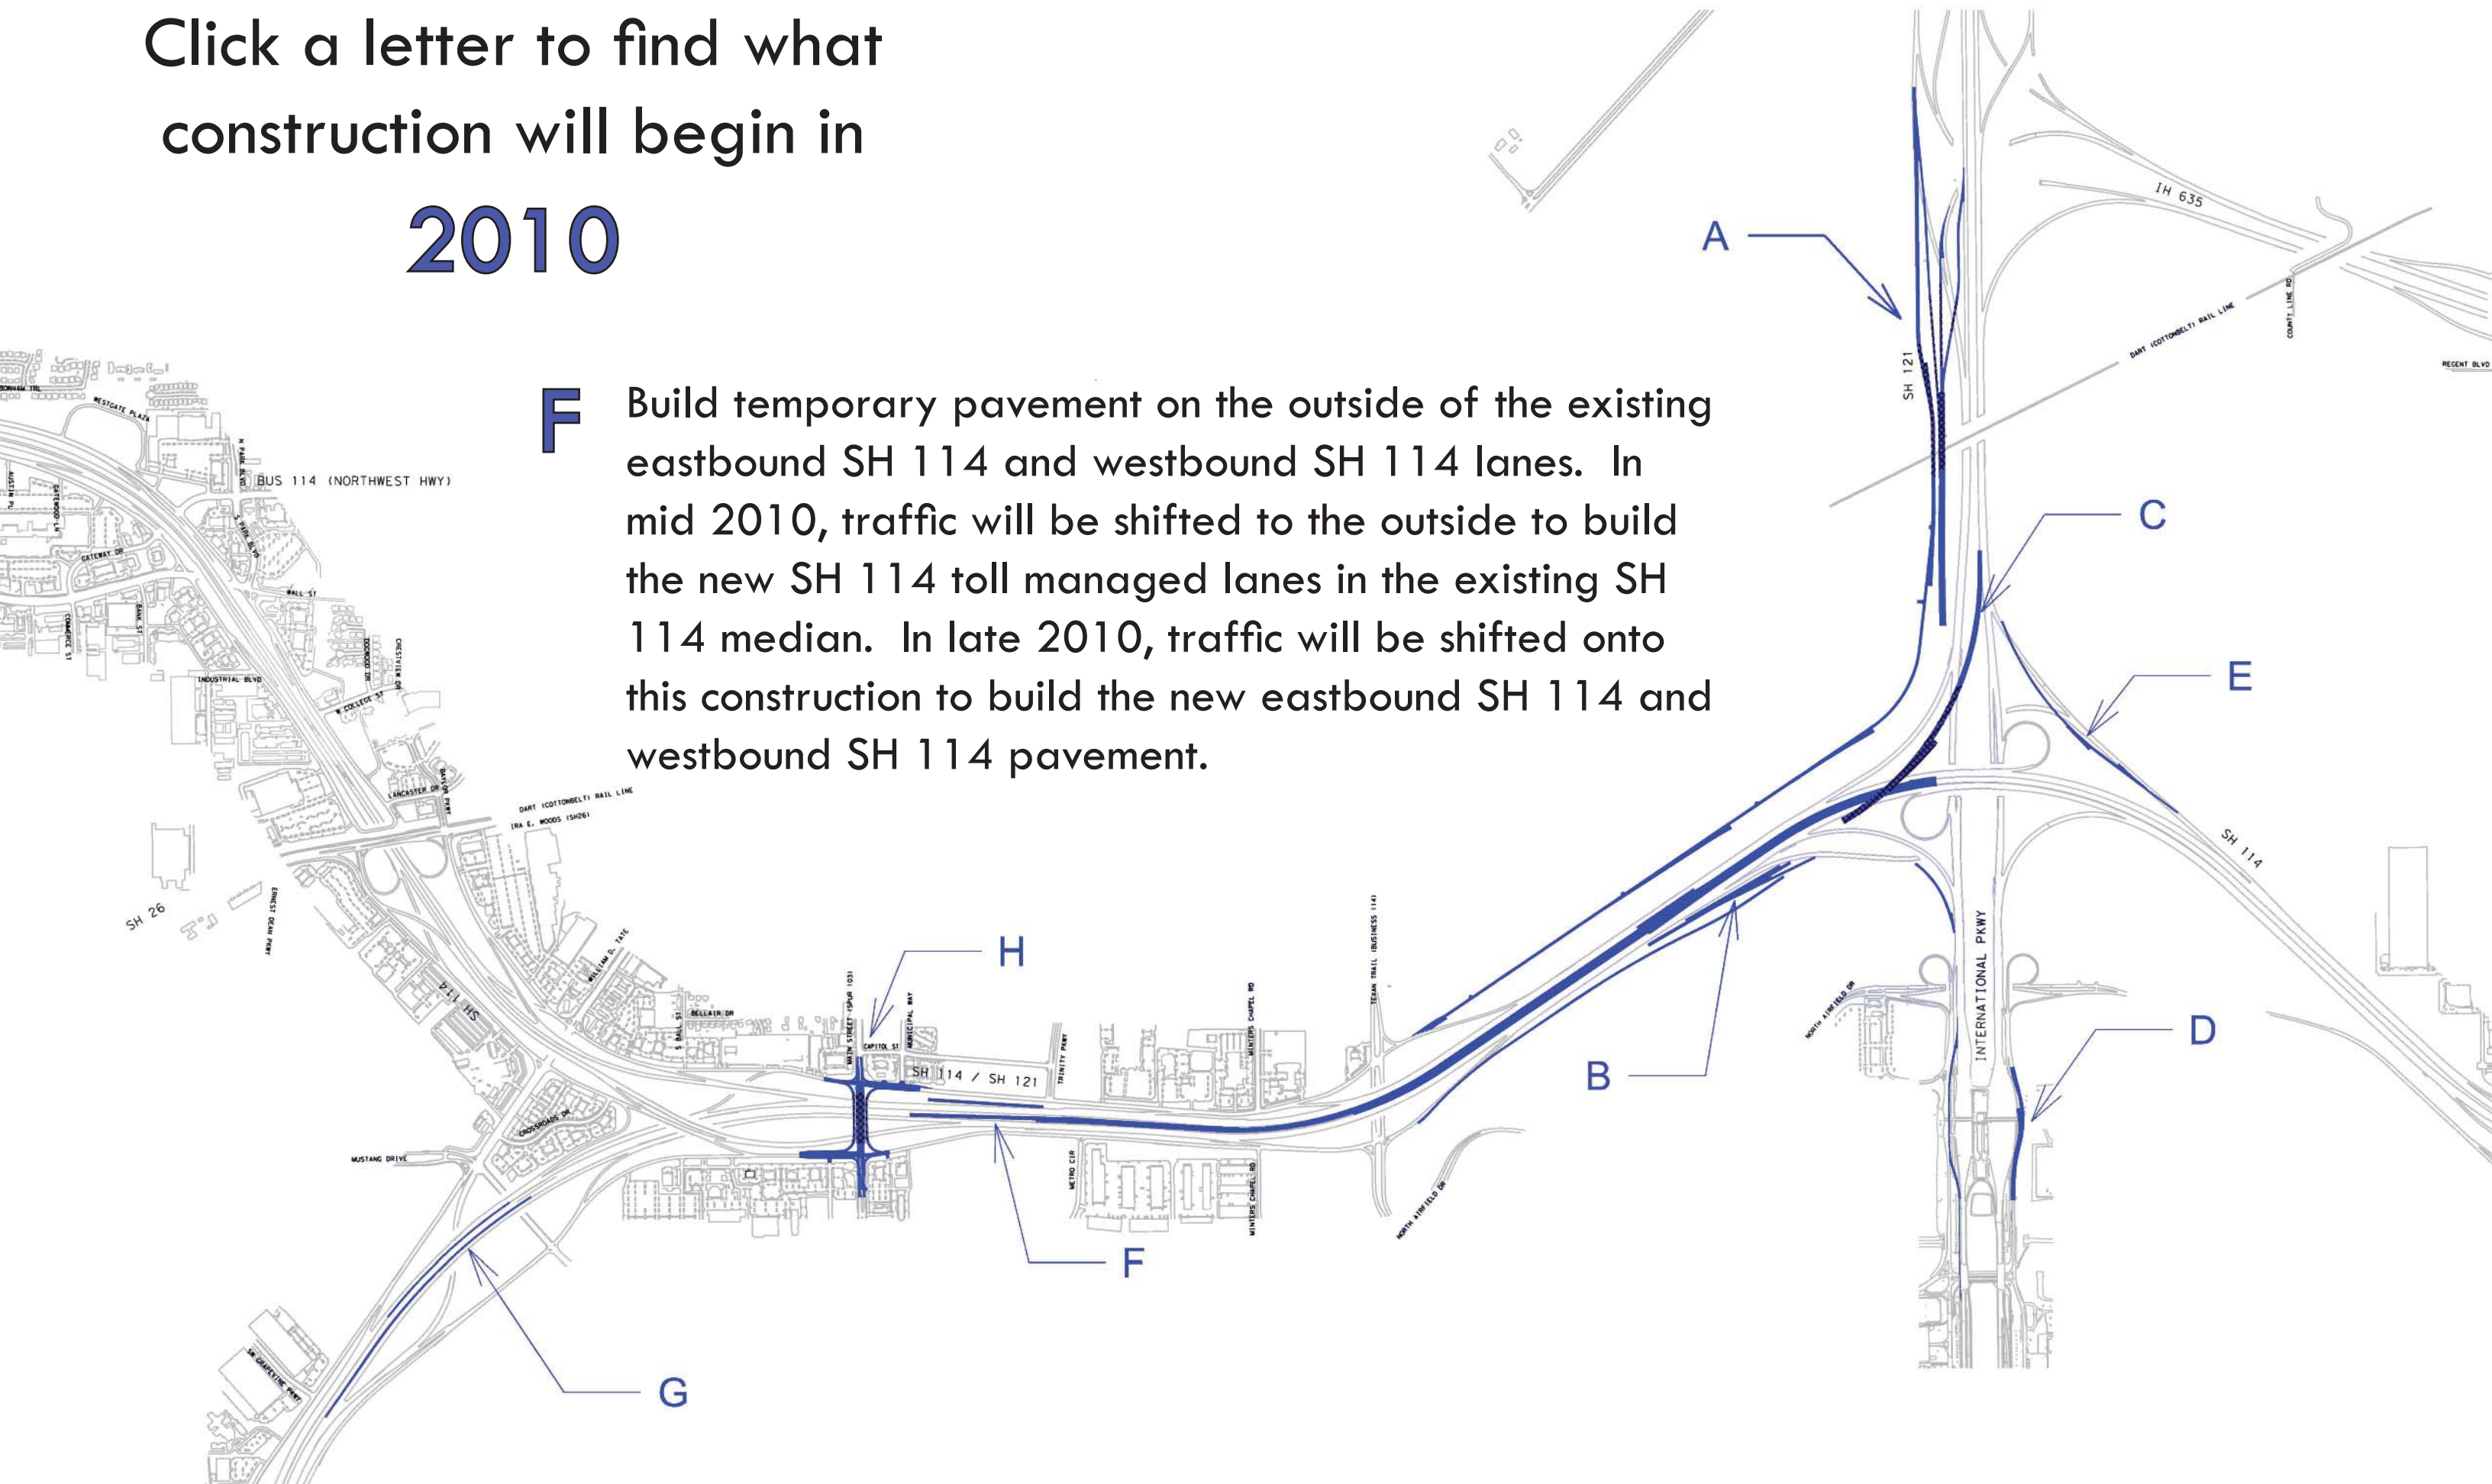

Click a letter to find what construction will begin in 2010

G Build temporary pavement and an additional lane of permanent pavement on the inside of the existing northbound SH 121 and southbound SH 121 lanes. In late 2010, northbound SH 121 and southbound SH 121 traffic will be shifted head-to-head in this area to build the new westbound SH 114 to southbound SH 121 bridge.

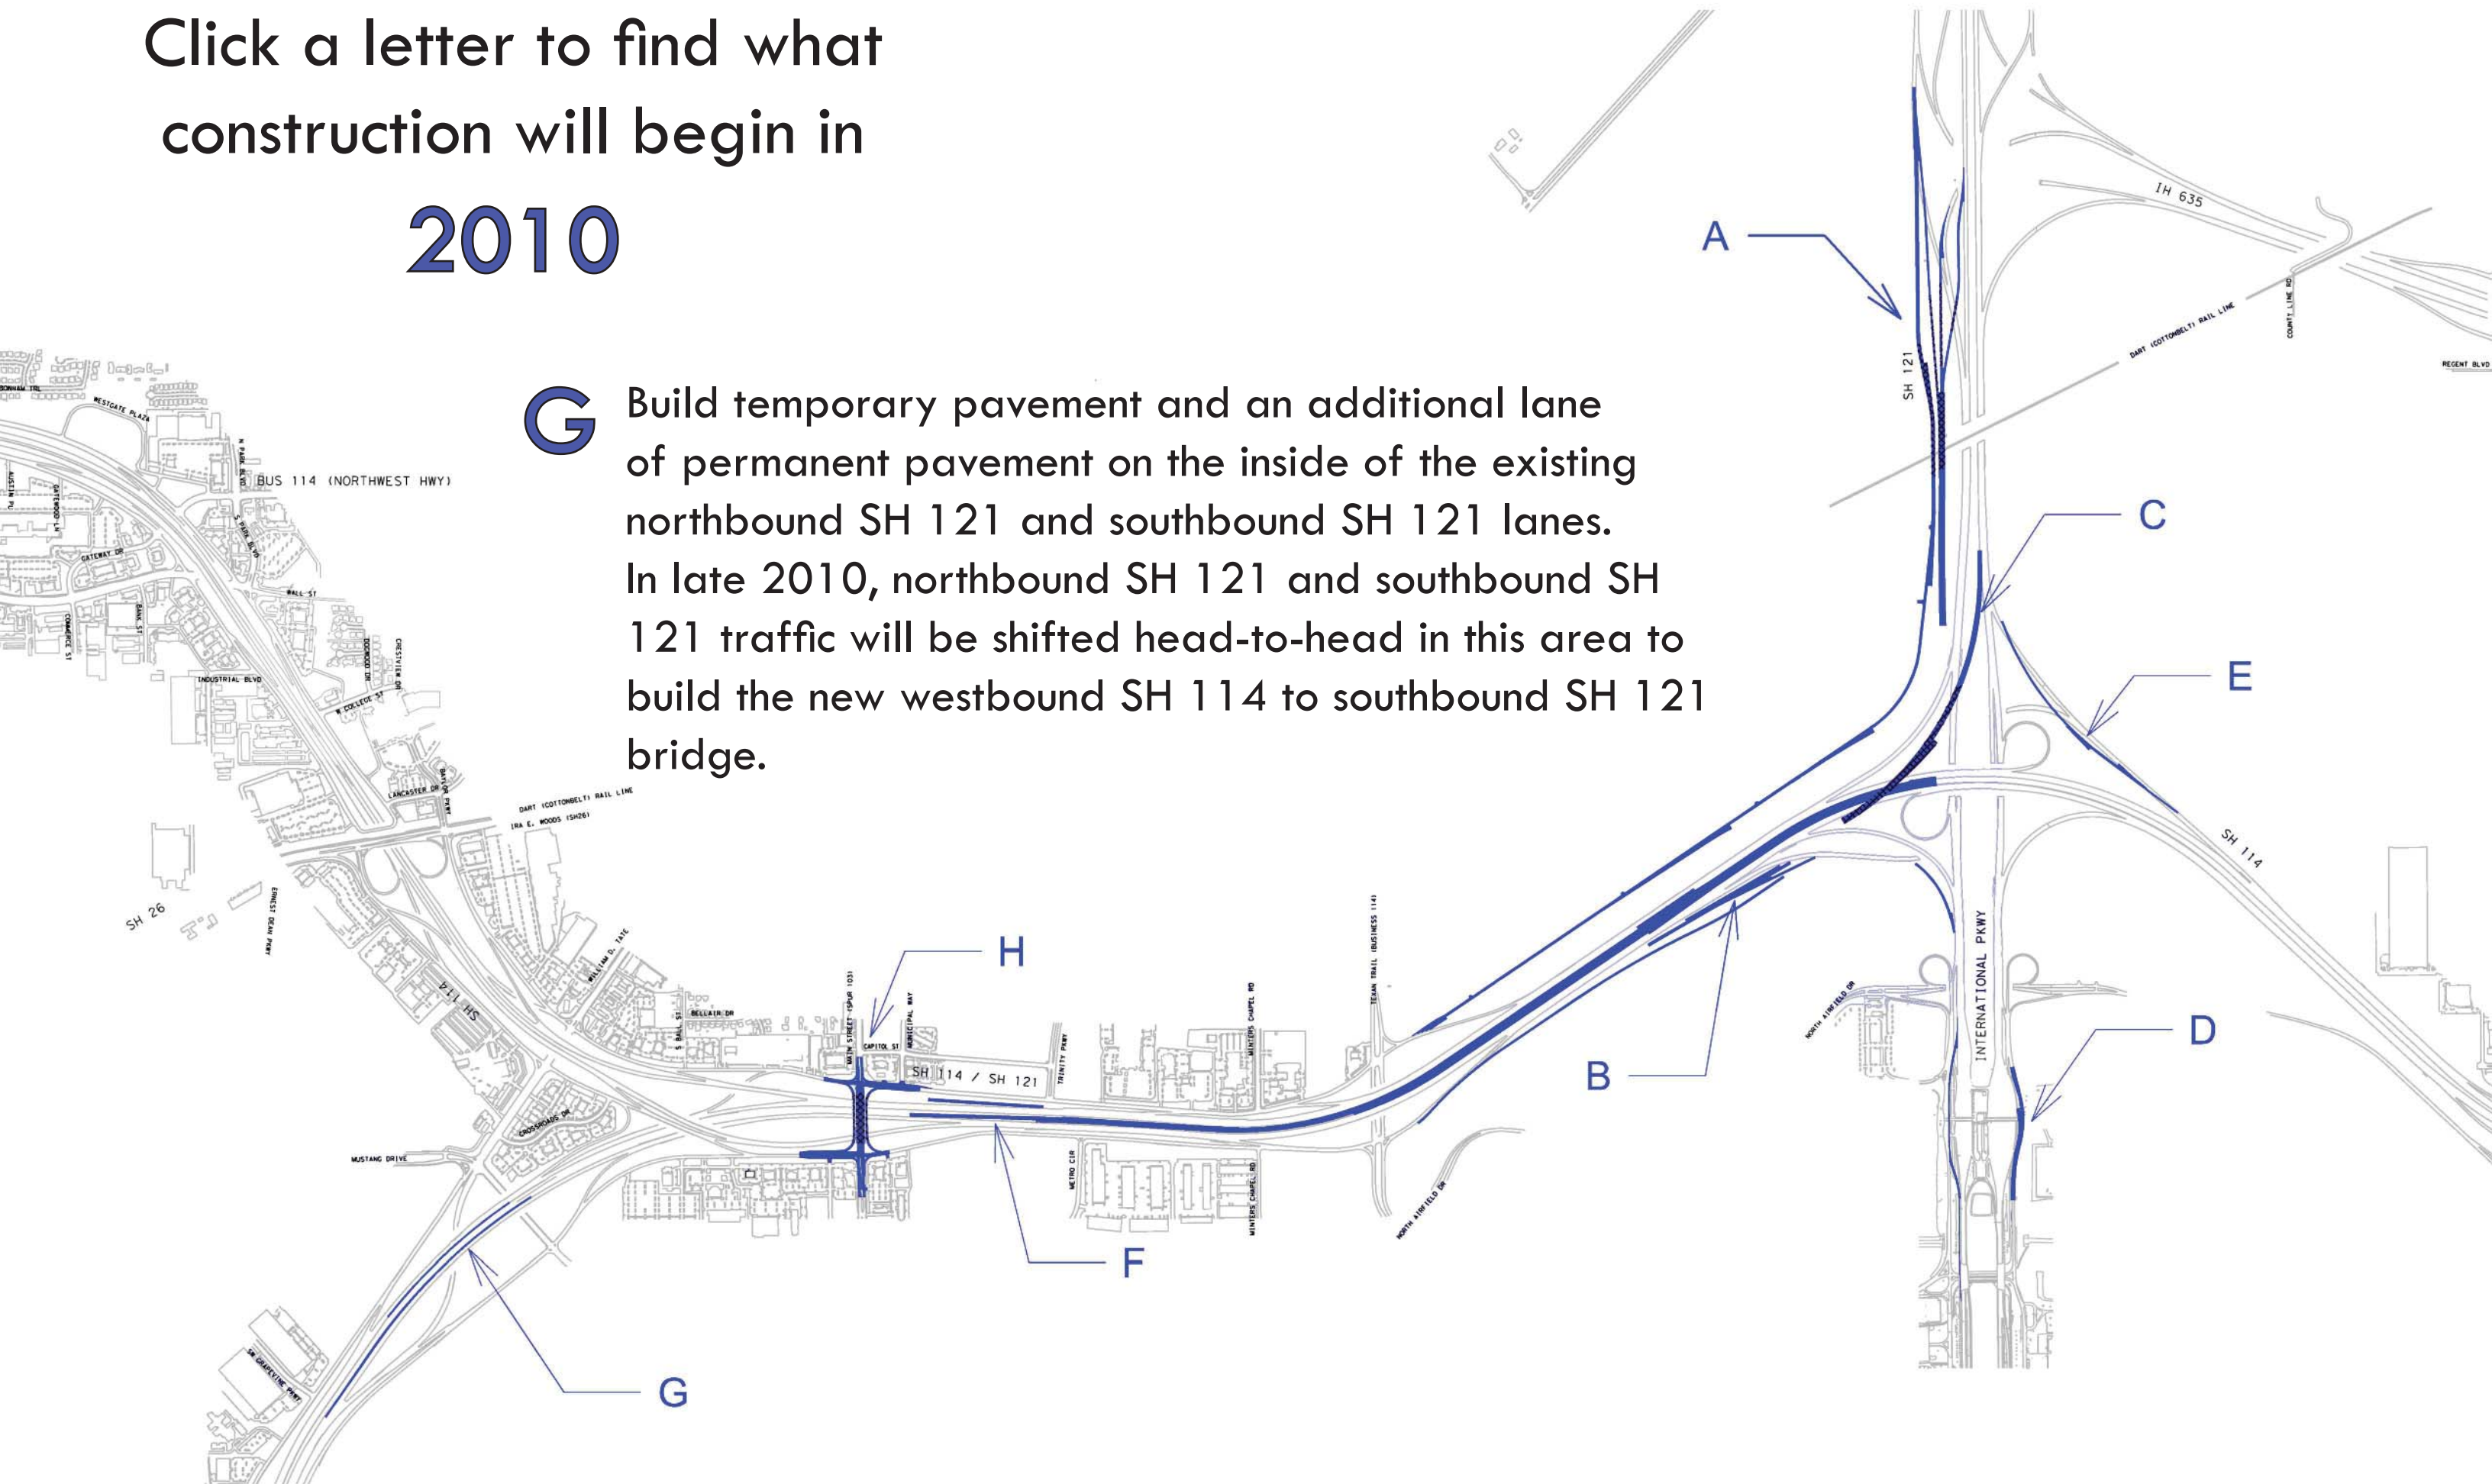

Click a letter to find what construction will begin in 2010

H Build the west half of the new Main Street bridge. In late 2010, traffic will be shifted onto the new portion of the bridge to build the east half of the bridge. Intersection work will begin in mid-to-late 2010. Construction at Main Street should be complete by mid 2011.

